

**DEVELOPMENT  
CONSTRUCTION  
SPECIFICATION**

**C211**

**CONTROL OF EROSION AND  
SEDIMENTATION**

[Return to Contents.](#)

**Amendment Record for this Specification Part**

This Specification is Council's edition of the AUS-SPEC generic specification part and includes Council's primary amendments.

Details are provided below outlining the clauses amended from the Council edition of this AUS-SPEC Specification Part. The clause numbering and context of each clause are preserved. New clauses are added towards the rear of the specification part as special requirements clauses. Project specific additional script is shown in the specification as italic font.

The amendment code indicated below is 'A' for additional script 'M' for modification to script and 'O' for omission of script. An additional code 'P' is included when the amendment is project specific.

<b>Amendment Sequence No.</b>	<b>Key Topic addressed in amendment</b>	<b>Clause No.</b>	<b>Amendment Code</b>	<b>Author Initials</b>	<b>Amendment Date</b>
1	<i>Removal of Sedimentation Control Structures</i>	09	O	KM	18-8-97
1	Pay Items	20(f), (g)	O	KM	18-8-97
SWR 34	Paragraph 3: Replace Existing paragraph with:" The embankments shall be constructed in accordance with the specification for EARTHWORKS."  Delete: Reference to RTA Test Method T166 in Clause C211.02 (b)	<b>C211.05</b>	A,O	KM	21/11/97
HC211.1	Additional Reference Documents .  Protection of the Enviroment Operations Act, 1998.  Hastings Council Erosion & Sediment Control Policy & Code	02.(c) & (d)	A	KM	23/09/98
HC211.2	Unless a Erosion and Sediment Control Plan is included in the approved engineering design, it shall be provided by the Contractor etc	03.1,2	M	KM	23/09/98
HC211.3	Hastings Council Erosion & Sediment Control Policy & Code for Guidance	03.4	M	KM	23/09/98

HC211.4	Delete "permanent" drainage structures replace with "Erosion Control" drainage structures	04.(a)	M	KM	23/09/98
HC211.5	Embankments of basins to be constructed in accordance with Earthworks Spec (C213)	05.3	M	KM	23/09/98
HC211.6	Inlets, spillways etc to be constructed in accordance with approved drawings	06.1	M	KM	23/09/98
HC211.7	Low flow outlet pipe increased from 150mmØ to 250mmØ	06.3	M	KM	23/09/98



## SPECIFICATION C211 CONTROL OF EROSION AND SEDIMENTATION

### GENERAL

#### C211.01 SCOPE

1. The work to be executed under this Specification consists of the construction of structures and the implementation of measures to control erosion and sedimentation. These may be temporary or permanent.
2. The Contractor shall plan and carry out the whole of the Works to avoid erosion and sedimentation of the site, surrounding country, watercourses, waterbodies and wetlands.

#### C211.02 REFERENCE DOCUMENTS

1. Documents referenced in this specification are listed in full below whilst being cited in the text in the abbreviated form or code indicated.

##### (a) Council Specifications

C212	-	Clearing and Grubbing
C213	-	Earthworks
C273	-	Landscaping

##### (c) State Legislation

NSW Clean Waters Act, 1970  
Soil Conservation Act, 1938  
Water Act, 1912  
Protection of the Environment Operations Act, 1198

##### (d) Other

NSW Department of Land and Water Conservation (DLWC)  
Urban Erosion and Sediment Control  
Hastings Council Erosion & Sediment Control Policy & Code

***Documents  
Standards Test  
Methods***

#### C211.03 EROSION AND SEDIMENTATION CONTROL PLAN

1. The Erosion and Sediment Control Plan may be included as part of the approved engineering design for the works. Where not provided as part of the designs, it shall be provided by the Contractor
2. For consideration of erosion and sedimentation control measures, the site shall be subdivided into sections based on the catchment area draining to each permanent drainage structure in the works. In addition to the area bounded by the road reserve, the sections shall include:

***Designs***

***Site Sections***

- (a) access and haulage tracks,
- (b) borrow pits and
- (c) compound areas, such as Contractor's facilities and concrete batching areas.

2. Unless detailed in the engineering designs approved for the works, at least fourteen days before the natural surface is disturbed on each of these sections, the Contractor shall submit to Council an Erosion and Sedimentation Control Plan for that section. This Plan shall be superimposed on half-sized drainage drawings of the works and shall be detailed for each catchment area of the works.

**Section Plan**

3. The Plan shall consist of scale diagrams indicating:

**Plan Inclusions**

- (a) features of the site including contours and drainage paths,
- (b) relevant construction details of all erosion and sedimentation control structures,
- (c) all permanent and temporary erosion and sedimentation control measures, including the control measures to be implemented in advance of, or in conjunction with, clearing and grubbing operations as required under the Specification for CLEARING AND GRUBBING,
- (d) an order of works based upon construction and stabilisation of all culverts and surface drainage works at the earliest practical stage, and
- (e) proposed time schedules for construction of structures and implementation of measures to control erosion and sedimentation.

4. The Hastings Council Erosion & Sediment Control Policy & Code provides guidance on typical permanent and temporary erosion and sedimentation control measures which may be required and guidance in the preparation of an Erosion and Sedimentation Control Plan.

**Guidance**

5. No work shall commence until Council has approved the Erosion and Sedimentation Control Plan. Such approval shall not relieve the Contractor of the full responsibility to provide whatever measures are required for effective erosion and sedimentation control at all times.

**Contractor's  
Responsibility**

6. The Contractor shall adhere to the approved Erosion and Sedimentation Control Plan. The Contractor shall, if required pursuant to clause C211.03.2, submit a revised Erosion and Sedimentation Control Plan for approval by Council fourteen days in advance of intended variation from the approved plan.

**Adherence to  
Plan**

#### **C211.04 EROSION AND SEDIMENTATION CONTROL MEASURES**

1. Erosion and sedimentation control measures shall include, but shall not be limited to, the following:

**Scope**

- (a) The installation of erosion control drainage structures before the removal of topsoil and commencement of earthworks for formation within the catchment area of each structure.
- (b) The prompt completion of all permanent and temporary drainage works, once commenced, to minimise the period of exposure of disturbed areas.

- (c) The stabilisation of diversion and catch drains to divert uncontaminated runoff from outside the site, clear of the site. Catch drains shall be installed and lined, as specified or as directed by the Superintendent, before the adjacent ground is disturbed and the excavation is commenced.
- (d) The passage of uncontaminated water through the site without mixing with contaminated runoff from the site.
- (e) The provision of contour and diversion drains across exposed areas before, during and immediately after clearing and the re-establishment and maintenance of these drains during soil removal and earthworks operations.
- (f) The provision of sediment filtering or sediment traps, in advance of and in conjunction with earthworks operations, to prevent contaminated water leaving the site.
- (g) The restoration of the above drainage and sedimentation control works on a day to day basis to ensure that no disturbed area is left without adequate means of containment and treatment of contaminated water.
- (h) The limitation of areas of erodible material exposed at any time to those areas being actively worked.
- (i) The minimisation of sediment loss during construction of embankments by means such as temporary or reverse superelevations during fill placement, constructing berms along the edge of the formation leading to temporary batter flumes and short term sediment traps.
- (j) The progressive vegetation of the site, in accordance with the Specification for LANDSCAPING, as work proceeds.

## **PERMANENT EROSION AND SEDIMENTATION CONTROL**

### **C211.05 EARTHWORKS FOR PERMANENT EROSION AND SEDIMENTATION CONTROL BASINS**

1. Earthworks for permanent erosion and sedimentation control basins shall be to the planned levels and dimensions shown on the Drawings or such levels and dimensions as determined by the Superintendent. ***Planned Levels***
2. The entire storage and embankment foundation area of permanent erosion and sedimentation control basins shall be cleared in accordance with the Specification for CLEARING AND GRUBBING and shall be stripped of topsoil and any unsuitable material under embankments removed in accordance with the Specification for EARTHWORKS. ***Site Preparation***
3. The embankments shall be constructed in accordance with the specification for EARTHWORKS. ***EARTHWORKS***
4. If payment for embankment construction is on a Schedule of Rates basis, at least three days before construction of the embankment the Contractor shall provide the Superintendent with survey information which will be sufficient to subsequently measure the volume of the constructed embankment. ***Contractor to Provide Survey Information***

**C211.06 INLETS, SPILLWAYS AND LOW FLOW OUTLETS FOR SEDIMENTATION CONTROL BASINS AND SEDIMENT TRAPS**

1. Inlets, spillways and low flow outlets for sedimentation control basins and sediment traps shall be constructed as per the approved drawings.

2. Inlets and spillways to be constructed using rock filled woven galvanised steel mattresses laid on a needle punched, mechanically bonded, non-woven geotextile filter fabric, as shown on the Drawings or as directed by the Superintendent. The rock filled mattresses shall be laid in accordance with the manufacturer's instructions and Specification.

***Rock  
Mattresses***

3. A low flow outlet consisting of a minimum 250 mm diameter plastic pipe shall be installed as shown in the Drawings. No extra payment shall be made for this work which shall be regarded as part of the construction of the sedimentation control basin.

***Plastic Pipe  
Outlet***

**C211.07 DROP INLET SEDIMENT CONTROL**

1. Drop inlet sediment traps and inlet control banks shall be constructed on completion of each gully pit unless otherwise directed by the Superintendent. These drop inlet sediment traps and inlet control banks are additional to the temporary sedimentation control measures that may be required under Clause C211.10 during construction of the gully pits.

***Time of  
Construction***

2. The drop inlet sediment traps are intended to remove sediment from the surface flow before it enters the drainage system. The inlet control banks shall be constructed as required to prevent the surface flows bypassing the gully pits.

***Purpose***

3. The drop inlet sediment traps shall be constructed as shown on the Drawings. The associated inlet control banks shall consist of at least two courses of sandbags containing a 10:1 sand/cement mix. The bags shall be keyed at least 25 mm into the surface, dampened sufficiently to ensure hydration of the cement and tamped lightly to provide mechanical interlock between adjacent bags.

***Control Banks***

**C211.08 CLEANING SEDIMENTATION CONTROL STRUCTURES**

1. The Contractor shall clean out permanent sedimentation control structures, cleaning out whenever the accumulated sediment has reduced the capacity of the structure by 50 per cent or more, or whenever the sediment has built up to a point where it is less than 300 mm below the spillway crest. All permanent sedimentation control structures shall be cleaned out by the Contractor prior to Practical Completion of the Works.

***Contractor's  
Responsibility***

2. Accumulated sediment shall be removed from permanent sedimentation control structures in such a manner as not to damage the structures. The sediment removed shall be disposed of in such locations that the sediment will not be conveyed back into the construction areas or into watercourses. The Contractor shall provide and maintain suitable access to permanent sedimentation control structures to allow cleaning out in all weather conditions.

***Removal of  
Sediment***

**C211.09 Reserved**



**TEMPORARY EROSION AND SEDIMENTATION CONTROL****C211.10 GENERAL**

1. The Contractor shall ensure that effective erosion and sedimentation control is provided at all times during the Contract.

***Contractor's Responsibility***

2. Runoff from all areas where the natural surface is disturbed by construction, including access roads, depot and stockpile sites, shall be free of pollutants as defined in the Clean Waters Act 1970 before it is either dispersed to stable areas or directed to natural watercourses. The Contractor shall be responsible for all temporary erosion and sedimentation control measures required for this purpose.

***Pollutant Free***

3. The Contractor shall provide and maintain slopes, crowns and drains on all excavations and embankments to ensure satisfactory drainage at all times. Water shall not be allowed to pond on the works unless such ponding is part of an approved Erosion and Sedimentation Control Plan.

***Maintenance by Contractor***

**C211.11 TEMPORARY DRAINS**

1. Runoff from areas exposed during the work shall be controlled by construction of temporary contour drains and/or temporary diversion drains. Generally, a temporary contour drain or temporary diversion drain takes the form of a channel constructed across a slope with a ridge on its lower side. They may require progressive implementation and frequent alteration as the work progresses.

***Control of Runoff***

2. Contour drains, which follow points on the natural surface of approximately the same elevation, shall be provided immediately after a construction site is cleared to intercept and divert runoff from the site to nearby stable areas at non-erosive velocities. Contour drains shall be formed with a grade of neither less than 1 per cent nor more than 1.5 per cent and shall be spaced at intervals of neither less than 20 m nor more than 50 m, depending on the erodibility of the exposed soil. Contour drains shall be constructed as shown on the Drawings.

***Contour Drains***

3. Diversion drains shall be provided across haul roads and access tracks when such roads and access tracks are identified as constituting an erosion hazard due to their steepness, soil erodibility or potential for concentrating runoff flow. Diversion drains shall be formed to intercept and divert runoff from the road or track to stable outlets. Spacing of diversion drains shall not be greater than that required to maintain runoff at non-erosive velocities.

***Diversion Drains***

**C211.12 TEMPORARY SEDIMENT TRAPS**

1. Temporary sediment-trapping devices shall be provided during construction to remove sediment from sediment-laden runoff flowing from areas of 0.5 hectares or more before the runoff enters natural watercourses or adjacent land.

***Sediment Traps***

**C211.13 BATTER PROTECTION**

1. The Contractor shall take all necessary action to protect batters from erosion during the Contract.

***Contractor's Responsibility***

2. Scour of newly-formed fill batters during and after embankment construction shall be minimised by diverting runoff from the formation away from the batter until vegetation is established.

***Scour Control***

**C211.14 MAINTENANCE AND INSPECTION**

1. The Contractor shall inspect all temporary erosion and sedimentation control works after each rain period and during periods of prolonged rainfall. Any defects revealed by such inspections shall be rectified immediately and these works shall be cleaned, repaired and augmented as required, to ensure effective erosion and sedimentation control thereafter.

**Contractor's  
Responsibility**

2. The Contractor shall provide and maintain access from within the road reserve or from other locations acceptable to the Superintendent, for cleaning out sedimentation control works.

**Access**

**C211.15 REMOVAL**

1. All temporary erosion and sedimentation control works shall be removed by the Contractor when revegetation is established on formerly exposed areas before the end of the Contract. All materials used for the temporary erosion and sedimentation control works shall be removed from the site or otherwise disposed by the Contractor to the satisfaction of the Superintendent.

**Contractor's  
Responsibility**

**SPECIAL REQUIREMENTS**

**C211.16 RESERVED**

**C211.17 RESERVED**

**C211.18 RESERVED**

**C211.19 RESERVED**

**MEASUREMENT AND PAYMENT****C211.20 PAY ITEMS**

1. Payment shall be made for all activities associated with completing the work detailed in this Specification, in accordance with Pay Items (a) to (g) inclusive.
2. A lump sum for any item other than Pay Item C211(a) shall not be accepted.
3. If any item for which a quantity of work listed in the Schedule of Rates has not been priced by the Contractor, it shall be understood that due allowance has been made in other items for the cost of the activity which has not been priced.
4. Clearing and grubbing is measured and paid in accordance with the Specification for CLEARING AND GRUBBING.
5. Landscaping works are measured and paid in accordance with the Specification for LANDSCAPING.
6. Topsoil stripping and removal of unsuitable material are measured and paid in accordance with the Specification for EARTHWORKS.

**Pay Item C211(a) TEMPORARY EROSION AND SEDIMENTATION CONTROL**

1. The unit of measurement shall be a lump sum for the installation, maintenance, inspection and removal of the temporary erosion and sedimentation control measures in accordance with Clauses C211.10 to C211.15 inclusive and the Drawings.

**Pay Item C211(b) EARTHWORKS FOR PERMANENT EROSION AND SEDIMENTATION CONTROL BASINS**

1. The unit of measurement shall be the cubic metre of compacted volume of embankment constructed in accordance with Clause C211.05 and the Drawings.
2. The volume shall be determined by calculation using the end area method.
3. The schedule rate shall cover the excavation of material from within the sedimentation control basin and embankment construction required under Clause C211.05 and shall be an average rate for all types of materials.
4. The cost of excavating and transporting material for embankment construction and obtained from within cuttings or from borrow shall be included in the schedule rate for General Excavation in the Specification for EARTHWORKS.

**Pay Item C211(c) INLETS, SPILLWAYS AND LOW FLOW OUTLETS FOR SEDIMENTATION CONTROL BASINS**

1. The unit of measurement shall be the square metre of horizontal surface area of rock filled mattress constructed in accordance with Clause C211.06 and the Drawings.

**Pay Item C211(d) DROP INLET SEDIMENT TRAPS AND INLET CONTROL BANKS**


1. The unit of measurement shall be 'each' drop inlet sediment trap including inlet control bank constructed in accordance with Clause C211.07 and the Drawings.

**Pay Item C211(e)      CLEANING OF PERMANENT SEDIMENTATION STRUCTURES**

1.      The unit of measurement shall be the in-place cubic metre of sediment removed from the structure in accordance with Clause C211.08.
2.      The volume of sediment removed shall be determined by survey or by methods approved by the Superintendent. The schedule quantity is a provisional quantity.

**Pay Item C211(f)      Reserved**

Pay Item C211(g)      Reserved

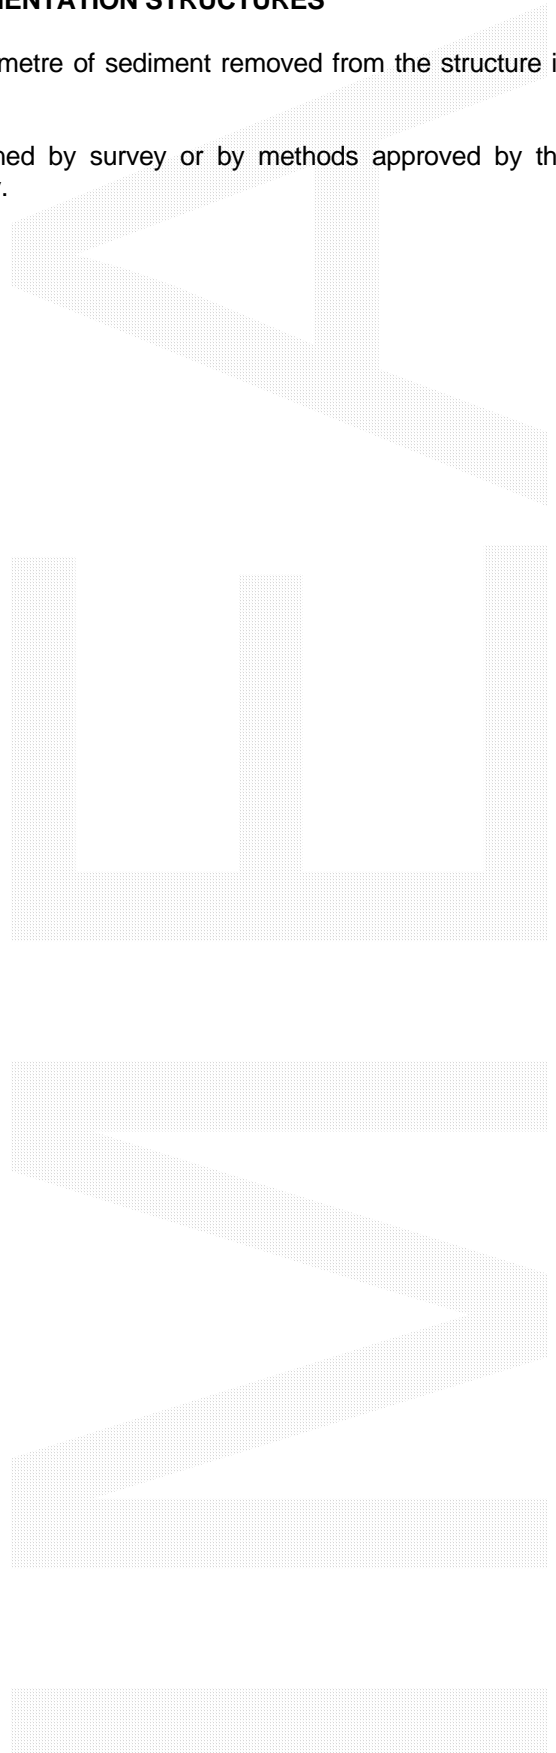

**SPECIFICATION C211 - CONTROL OF EROSION AND SEDIMENTATION**

<b>CLAUSE</b>	<b>CONTENTS</b>	<b>PAGE</b>
<b>GENERAL.....</b>		<b>1</b>
C211.01	SCOPE.....	1
C211.02	REFERENCE DOCUMENTS.....	1
C211.03	EROSION AND SEDIMENTATION CONTROL PLAN .....	1
C211.04	EROSION AND SEDIMENTATION CONTROL MEASURES .....	2
<b>PERMANENT EROSION AND SEDIMENTATION CONTROL.....</b>		<b>3</b>
C211.05	EARTHWORKS FOR PERMANENT EROSION AND SEDIMENTATION CONTROL BASINS .	3
C211.06	INLETS, SPILLWAYS AND LOW FLOW OUTLETS FOR SEDIMENTATION CONTROL BASINS AND SEDIMENT TRAPS.....	4
C211.07	DROP INLET SEDIMENT CONTROL.....	4
C211.08	CLEANING SEDIMENTATION CONTROL STRUCTURES .....	4
C211.09	REMOVAL OF SEDIMENTATION CONTROL STRUCTURES .....	4
<b>TEMPORARY EROSION AND SEDIMENTATION CONTROL.....</b>		<b>5</b>
C211.10	GENERAL.....	5
C211.11	TEMPORARY DRAINS .....	5
C211.12	TEMPORARY SEDIMENT TRAPS.....	5
C211.13	BATTER PROTECTION.....	5
C211.14	MAINTENANCE AND INSPECTION .....	6
C211.15	REMOVAL.....	6
<b>SPECIAL REQUIREMENTS.....</b>		<b>6</b>
C211.16	RESERVED .....	6
C211.17	RESERVED .....	6
C211.18	RESERVED .....	6
C211.19	RESERVED .....	6
<b>MEASUREMENT AND PAYMENT.....</b>		<b>7</b>

C211.20 PAY ITEMS ..... 7

