

DEVELOPMENT CONSTRUCTION SPECIFICATION

C212

CLEARING AND GRUBBING

[Return to Contents.](#)

Amendment Record for this Specification Part

This Specification is Council's edition of the AUS-SPEC generic specification part and includes Council's primary amendments.

Details are provided below outlining the clauses amended from the Council edition of this AUS-SPEC Specification Part. The clause numbering and context of each clause are preserved. New clauses are added towards the rear of the specification part as special requirements clauses. Project specific additional script is shown in the specification as italic font.

The amendment code indicated below is 'A' for additional script 'M' for modification to script and 'O' for omission of script. An additional code 'P' is included when the amendment is project specific.

Amendment Sequence No.	Key Topic addressed in amendment	Clause No.	Amendment Code	Author Initials	Amendment Date
HC212.1	<i>Verification of limits of clearing with Council</i>	02.2&3	M,A	KM	23/09/98
	<i>Deletion of Council inspection at this stage.</i>	03.2	M		
	<i>Clause moved to C212.02.3</i>	03.4	O		
HC212.2	Chipping of Cleared Vegetation	05.1	M	KM	23/09/98
HC212.3	7 days Notice of method of Disposal of Materials	06.3	A	KM	23/09/98
HC212.4	Overhanging branches to be cut back to the trunk	03.4	M	KM	23/09/98

SPECIFICATION C212 CLEARING AND GRUBBING

C212.01 SCOPE

1. The work to be executed under this Specification consists of the clearing of all vegetation, both living and dead, all minor man-made structures (such as fences and livestock yards), all rubbish and other materials which, in the opinion of the Superintendent, are unsuitable for use in the Works, the chipping of the crowns of trees and the branches of shrubs, and the grubbing of trees and stumps from the area defined in Clause C212.02. The work also includes the disposal, in accordance with Clause C212.05 and C212.06, of all materials that have been cleared and grubbed.

Extent of Work

2. In advance of or in conjunction with clearing and grubbing operations, effective erosion and sedimentation control measures shall be implemented in accordance with the Specification for CONTROL OF EROSION AND SEDIMENTATION.

Erosion Control

3. The clearing and grubbing required for boundary fencing is included in the Pay Item for Boundary Fencing and does not form part of the work under this Specification.

Boundary Fence Line

C212.02 LIMITS OF CLEARING

1. Unless otherwise specified or directed, the area to be cleared is that required by site regrading works, including the area occupied by the completed road formation and associated drainage works and erosion and sedimentation measures, plus a clearance of 2m beyond tops of cuts and toes of embankments.

Limits of Clearing

2. Before clearing commences, the limits of clearing shall be marked by pegs placed by the Contractor at 25m intervals, or marker tape, around the area to be cleared and verified with the Superintendent and Council's representative.

Indicator Pegs

3. Any tree within the road reserve but outside the limits of clearing which is, in the opinion of the Superintendent and Council's representative, unsound and likely to fall upon the roadway shall be cleared and disposed of in accordance with Clause C212.05.

Unsound trees in Road Reserve

C212.03 CLEARING OPERATIONS

1. The area within the limits of clearing shall be cleared of all vegetation, both living and dead, all minor man-made structures (such as fences and livestock yards), all rubbish and other materials which, in the opinion of the Superintendent, are unsuitable for use in the Works with the exception of certain trees marked for preservation.

Extent

2. The Contractor shall give the Superintendent written notice of seven days of the intention to clear any area of the work. The Superintendent shall mark or indicate to the Contractor the trees that shall be preserved. The Contractor shall take protective measures during the operations of clearing and road construction to avoid damaging or destroying such trees.

Trees to be preserved

3. The Contractor shall plan all operations to ensure that there is no damage to any trees outside the limits of clearing specified or directed by the Superintendent. No growing trees shall be destroyed or damaged by the Contractor other than those specified and those indicated by the Superintendent.

Trees outside Limits of Work

- 4. Any branch, which overhangs the road formation, shall be cut back to the tree trunk and disposed of in accordance with Clause C212.05. **Overhanging branches**
- 5. Every precaution shall be taken to prevent timber from falling on private property and the Contractor shall dispose of any timber so fallen or produce the written consent of the owner to its remaining there. The cost of disposal of such fallen timber shall be borne by the Contractor. **Debris in Private Property**
- 6. Damage of any kind, including damage to fencing, occurring during clearing operations shall be made good by the Contractor. The cost of making good such damage shall be borne by the contractor. **Damage to Property**

C212.04 GRUBBING

- 1. All trees and stumps, on or within the limits of clearing, unable to be felled and removed by the clearing methods used by the Contractor shall be removed by grubbing. **Extent**
- 2. Grubbing operations shall be carried out to a depth of 0.5 m below the natural surface or 1.5m below the finished surface level, whichever is the lower. **Depth**
- 3. Holes remaining after trees and stumps have been grubbed shall be backfilled promptly with sound material to prevent the infiltration and ponding of water. The backfilling material shall be compacted to at least the relative density of the material existing in the adjacent ground. **Backfill Holes**

C212.05 CHIPPING OF CLEARED VEGETATION

- 1. Unless otherwise specified by the Superintendent, the Contractor shall produce a wood-chip mulch derived from crowns of trees and branches of shrubs cleared under this Specification. The wood-chip mulch produced shall be stockpiled for subsequent use in accordance with the Specification for LANDSCAPING or for use at other locations as appropriate. **Wood-chip Mulch**
- 2. The wood-chip mulch shall be produced from branches having a maximum diameter of 100 millimetres and the chipped material produced shall not have two orthogonal dimensions exceeding 75mm and 50mm. **Dimensions**

C212.06 DISPOSAL OF MATERIALS

- 1. Unless otherwise specified elsewhere, all materials cleared and grubbed in accordance with this Specification shall become the property of the Contractor and shall be removed from the site and legally disposed of. **Removal from Site**
- 2. Unless otherwise approved by the Superintendent in writing, disposal of timber and other combustible materials by burning shall not be permitted. Where the Contractor obtains the prior written approval of the Superintendent, the Contractor shall comply with all Statutory requirements applicable to burning off, and any such burning off shall be carried out in such a manner that no damage is done to any trees outside the limits of clearing. Smoke resulting from such burning off shall not cause a traffic hazard. **Burning not Permitted**
- 3. The Contractor shall submit, seven (7) days prior to disposal, notice of method of disposal of material for the approval of the Superintendent and Council's representative. **Approval**


MEASUREMENT AND PAYMENT

C212.07 PAY ITEMS

1. Payment shall be made for all activities associated with completing the work detailed under this Specification entitled Clearing and Grubbing in accordance with Pay Item C212(a).

Pay Item C212(a) CLEARING AND GRUBBING

1. The unit of measurement shall be the hectare of plan area bounded by the limits of clearing specified in Clause C212.02.

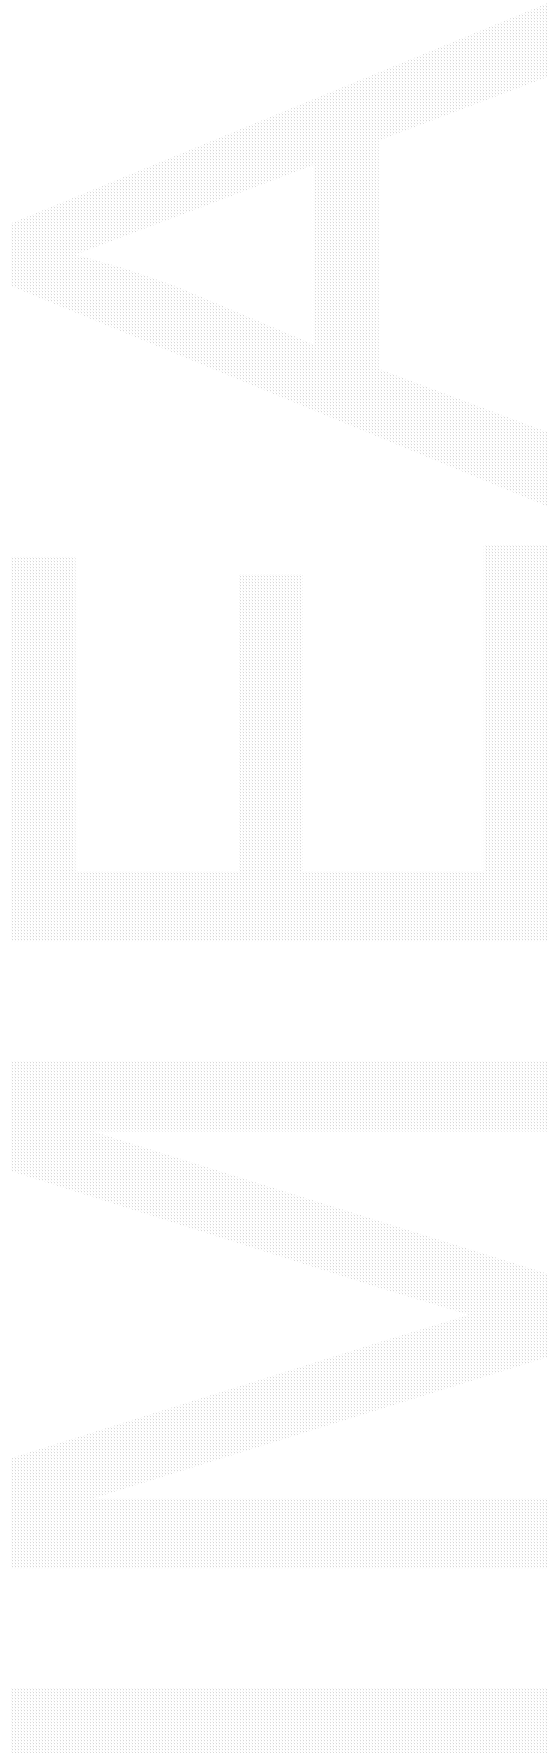

SPECIFICATION C212 - CLEARING AND GRUBBING

CLAUSE		PAGE
C212.01	SCOPE.....	1
C212.02	LIMITS OF CLEARING.....	1
C212.03	CLEARING OPERATIONS	1
C212.04	GRUBBING	2
C212.05	CHIPPING OF CLEARED VEGETATION	2
C212.06	DISPOSAL OF MATERIALS.....	2
MEASUREMENT AND PAYMENT.....		3
C212.07	PAY ITEMS	3